

## LITHIUM IRON PHOSPHATE BATTERY

### ELECTRICAL PERFORMANCE

|                  |                |
|------------------|----------------|
| Nominal Voltage  | 25.6 V         |
| Nominal Capacity | 100 Ah         |
| Capacity 20A     | 300 min        |
| Energy           | 2560 Wh        |
| Resistance       | ≤20 mΩ 50% SOC |
| Self Discharge   | <3% / Month    |
| Cells            | LFP Cell 3.2V  |

### CHARGE PERFORMANCE

|                             |            |
|-----------------------------|------------|
| Recommended Charge Current  | 20 A       |
| Maximum Charge Current      | 50 A       |
| Charge Cut-Off Voltage      | 29.2 V     |
| Reconnect Voltage           | >28 V      |
| Balancing Voltage           | <27.2 V    |
| Maximum Batteries in Series | 2 Optional |
| Bluetooth Test Window       | (Optional) |
| LED display                 | (Optional) |

### DISCHARGE PERFORMANCE

|                                      |                  |
|--------------------------------------|------------------|
| Continuous Discharge Current         | 50 A             |
| Maximum Continuous Discharge Current | 150 A            |
| Peak Discharge Cut-Off Current       | 300 A (5 ~15 ms) |
| Discharge Cut-Off Voltage            | 20 V             |
| Reconnect Voltage                    | >22.4 V          |
| Short Circuit Protection             | 200 ~ 600 μs     |



### MECHANICAL PERFORMANCE

|                       |                                            |
|-----------------------|--------------------------------------------|
| Dimension (L x W x H) | 483 x 170 x 240 mm<br>19.01 x 6.69 x 9.45" |
| Approx. Weight        | About 20 kg                                |
| Terminal Type         | M8                                         |
| Terminal Torque       | 80 ~ 100 in-lbs (9 ~ 11 N-m)               |
| Case Material         | ABS                                        |
| Enclosure Protection  | IP65                                       |


### TEMPERATURE PERFORMANCE

|                          |                           |
|--------------------------|---------------------------|
| Discharge Temperature    | -4 ~ 140 °F (-20 ~ 60 °C) |
| Charge Temperature       | 32 ~ 113 °F (0 ~ 45 °C)   |
| Storage Temperature      | 23 ~ 95 °F (-5 ~ 35 °C)   |
| High Temperature Cut-Off | 149 °F ( 65 °C )          |
| Reconnect Temperature    | 118 °F (48 °C)            |

### COMPLIANCE

|                         |                                   |
|-------------------------|-----------------------------------|
| Certifications          | CE<br>UN38.3<br>UL1973 & IEC62619 |
| Shipping Classification | UN 3480, CLASS 9                  |


### OUTLINE DIMENSION

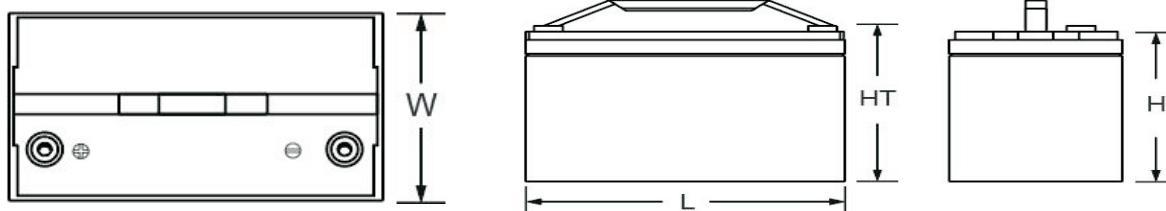


| L mm(")     | W mm(")    | H mm(")    | HT mm(") |
|-------------|------------|------------|----------|
| 483 (19.01) | 170 (6.69) | 240 (9.45) |          |

## PERFORMANCE CHARACTERISTICS


Discharge Performance at 25°C

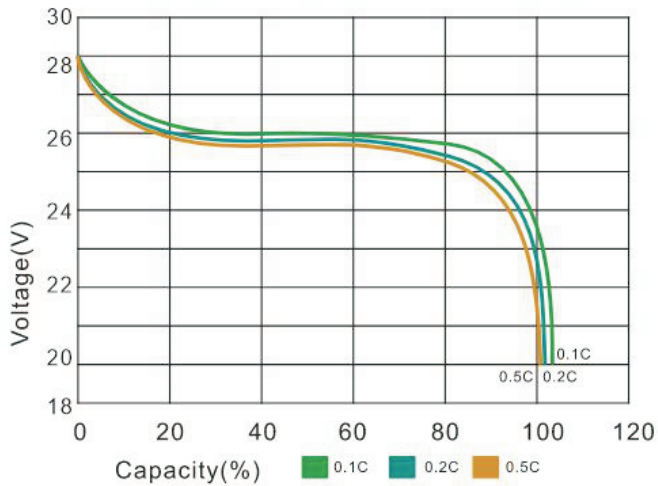


Temperature effects on capacity at 0.5C

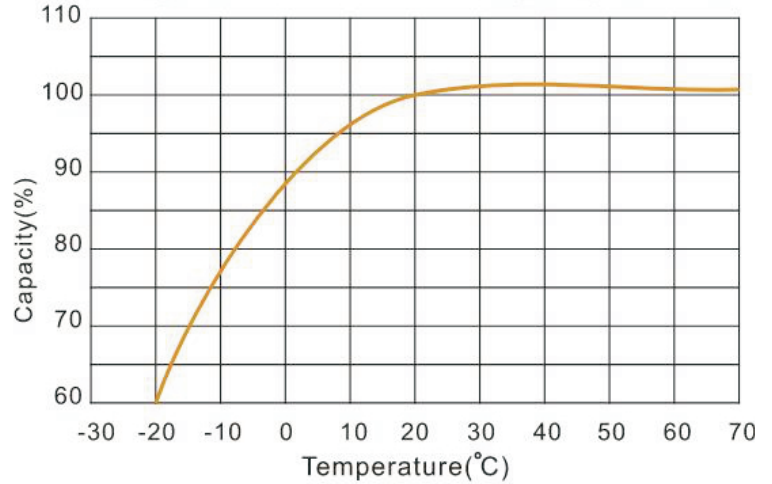

State of Charge Curve (0.5C, 25°C)

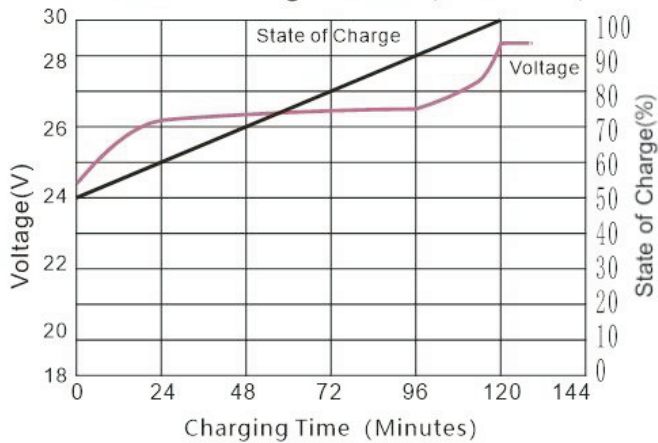

Cycle life with DOD at 25°C, 0.5C

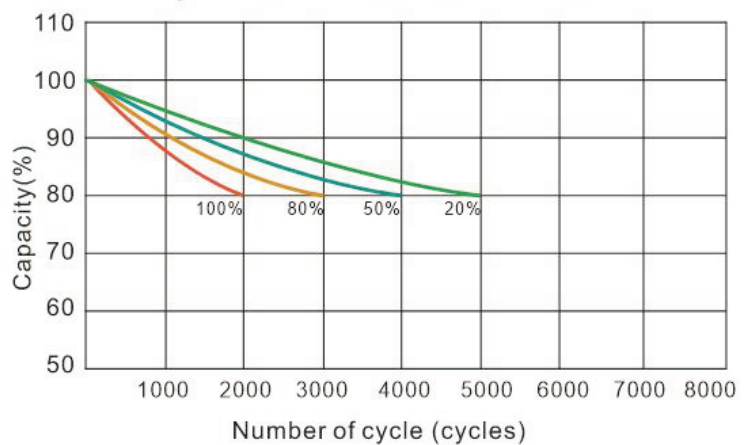

## FEATURES & BENEFITS



### High cycle life

>3000 @80%

>3000 cycles @80% DOD for effectively lower total cost of ownership.



### Longer service life

Low maintenance batteries with stable chemistry. Easily monitor state of charge (SOC) of smart models.



### Built in circuit protection

Battery Management Systems (BMS) are incorporated against abuse.



### Better storage

Up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



### Quickly recharge

Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



### Extreme heat tolerance

Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.



### Lightweight

Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.

## APPLICATIONS

Lithium Iron Phosphate can be used in most applications that use Lead Acid, GEL or AGM type batteries.

Suitable applications include:

- Caravan
- Marine
- Golf Car
- Buggies
- Solar Storage
- Remote Monitoring
- Switching applications and more

## CAUTIONS

- Do NOT short circuit, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.